




Dramix®

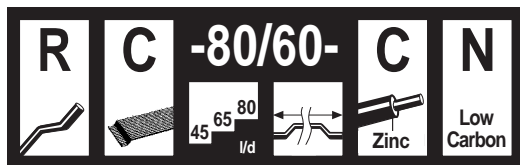

Description:


Dramix® fibres are filaments of wire, deformed and cut to lengths, for reinforcement of concrete, mortar and other composite materials. Dramix® RC-80/60-CN is a galvanised glued cold drawn wire fibre, with hooked ends.



Applications:

- precast
- cellar walls

Geometry:



80 Performance class: 80
Aspect ratio (= l/d): 80

4600 fibres/kg

Tensile strength:

- on the wire: minimum 1150 N/mm²
- low carbon conforms to EN 10016-2 - C9D

Coating: Zinc

Approvals:



Product
Belgium
ATG 04/1857
The Netherlands
22212
Czech Republic
C.070-021415

Product
Poland
AT-15-2117/2001
Romania
007-01/068-2003
Germany
Z-3.71-1745
Slovak Republic
1402A/02/0771/1/C/C04

Recommendations - mixing

1. General

- ✓ preferably use a central batching plant mixer
- ✓ recommended maximum dosage:

Max. aggregate size (mm)	Dosage (kg/m ³)	
	pour	pump
8	60	45
16	50	35
32	35	30

- ✓ a continuous grading is preferred
- ✓ mix until all glued fibres are separated into individual fibres. Fibres don't increase mixing time significantly.
- ✓ if special cements or admixtures are used, a preliminary test is recommended



2. Fibre addition

Bags are non-degradable and may not be thrown into the concrete.



2.1. In batching plant mixer

- ✓ never add fibres as first component in the mixer
- ✓ fibres can be introduced together with sand and aggregates, or can be added in freshly mixed concrete



2.2. Truckmixer

- ✓ run mixer at drum speed: 12-18 rpm
- ✓ adjust slump to a min. of 12 cm (preferably with water reducing agents or high water reducing agents)
- ✓ add fibres with maximum speed of 40 kg/min
- ✓ optional equipment: belt-hoist elevator
- ✓ after adding the fibres, continue mixing at highest speed for 4-5 min. (± 70 rotations)



2.3. Automatic dosing

- ✓ Fibres can be dosed from bulk at rates from 0 up to 3,5 kg/sec with a specially developed dosing equipment



Recommendations - storage

 Protect the pallets against rain	 Do not stack the pallets on top of each other	Delivered in non water-soluble bags of 20 kg on pallet 1200 kg big bag 1100 kg
--------------------------------------	---	---

N.V. Bekaert S.A. - Bekaertstraat 2 - 8550 Zwevegem - Belgium
Tel. +32 (0) 56 / 76 69 86 - Fax +32 (0) 56 / 76 79 47
Internet: <http://www.bekaert.com/building>

Values are indicative only. Modifications reserved. All details describe our products in general form only. For ordering and design only use official specifications and documents. N.V. Bekaert S.A. 2005